



Transport Desgagnés inc.

21 Marché-Champlain Street
 Québec (QC) G1K 8Z8
 Canada
 Tel: 418.692.1000
 Fax: 418.692.6044
 Email: info@desgagnes.com
 Website: www.desgagnes.com

M/T Mia Desgagnés



MAIN PARTICULARS

GRT: 12,061 NRT: 4,332
 LOA: 135.00 m LBP: 130.24 m
 Breadth: 23.50 m Depth: 11.30 m
 Deadweight: 14,986 mt at a draft of 7.8 m

Builder: Besiktas Gemi Insa Shipyard, Turkey, 2017
 IMO No: 9772278
 Port of Registry: Quebec
 Flag: Canada
 Official number: 841168
 Call sign: CFAU
 MMSI: 316 031 772
 Type: IMO 2 Chemical Product Carrier
 Class: I *Hull *Mach, Chemical Tanker/Oil Tanker, ESP, Dual-Fuel, Unrestricted Navigation, Polar Class 7 *AUT-UMS, *SYS-NEQ-1, MON-SHAFT, Green Passport, Protected FO, Tank, CleanShip Super (BWM, GWT, NDO-7 days), Inwater Survey, SPM, VCS, Cold (H-30)

CARGO SYSTEM

Total Capacity: 17,505 m³ (17,155 m³ @ 98%)
 Number of Tanks: 12 x Cargo + 2 x Slop + 1 x Residual
 Segregation: 12 x Cargo + 2 x Slop (14 in total)
 Max. Loading Rate: 400 m³/h for each tank
 Max. Discharge Rate: 1800 m³/h, 6 Cargo Pumps
 Cargo Tank Pumps: 12 x 300 m³/h, 13 bar
 Slop & Residue Tank Pumps: 3 x 150 m³/h, 10 bar
 Portable Emergency Pump: 1 x 70 m³/h, 7 bar

MACHINERY

1 x Wärtsilä 5RT-Flex 50DF, 5,450 kW, 110 rpm
 1 x Auxiliary Generator, 1,665 kW, 1,200 rpm
 2 x Auxiliary Generators of 1,110 kW each, 1,200 rpm
 1 x Emergency Generator, 300 kW
 1 x Shaft Alternator/E-motor, 1,450 kW (TPO/PTI – ASP mode)
 1 x Variable Pitch Propeller, 4 blades, 5,200 mm dia.
 1 x Bow Thruster, 750 kW & 1 x Stern Thruster, 550 kW
 2 x Thermal Oil Heater, 3,000 kW each

SPEED AND CONSUMPTION

Speed: 13.0 knots | 14.0 knots
 M/E Cons. at sea: 13.9 mt/day | 19.9 mt/day (15% sea margin)
 Gen Cons. in port: 1.5 – 8.0 mt/day (discharging)
 Gen. Cons. at sea: 1.5 – 2.0 mt/day
 Boiler Cons.: up to 4.0 mt/day based on cargo and weather


TANK CAPACITIES

HFO | MDO: 565 m³ | 243 m³
 LNG: 625 m³
 Fresh Water: 645 m³

BALLAST SYSTEM

Pumps: 2 x 500 m³/h, 2 bar
 Total Ballast: 6,793 m³

- Computerized Monitoring System for Cargo and Ballast Tanks, including Ullage, Temperature, High Level Alarm, etc.
- Fixed & Portable Washing, Fixed Gas-Freeing System for Cargo Tanks
- Loading Software including Stability Calculation for Intact or Damaged Vessel, etc.
- Stainless Steel Heating Coils for Cargo, Slop and Residue Tanks
- Closed Loading System with Vapor Return Line

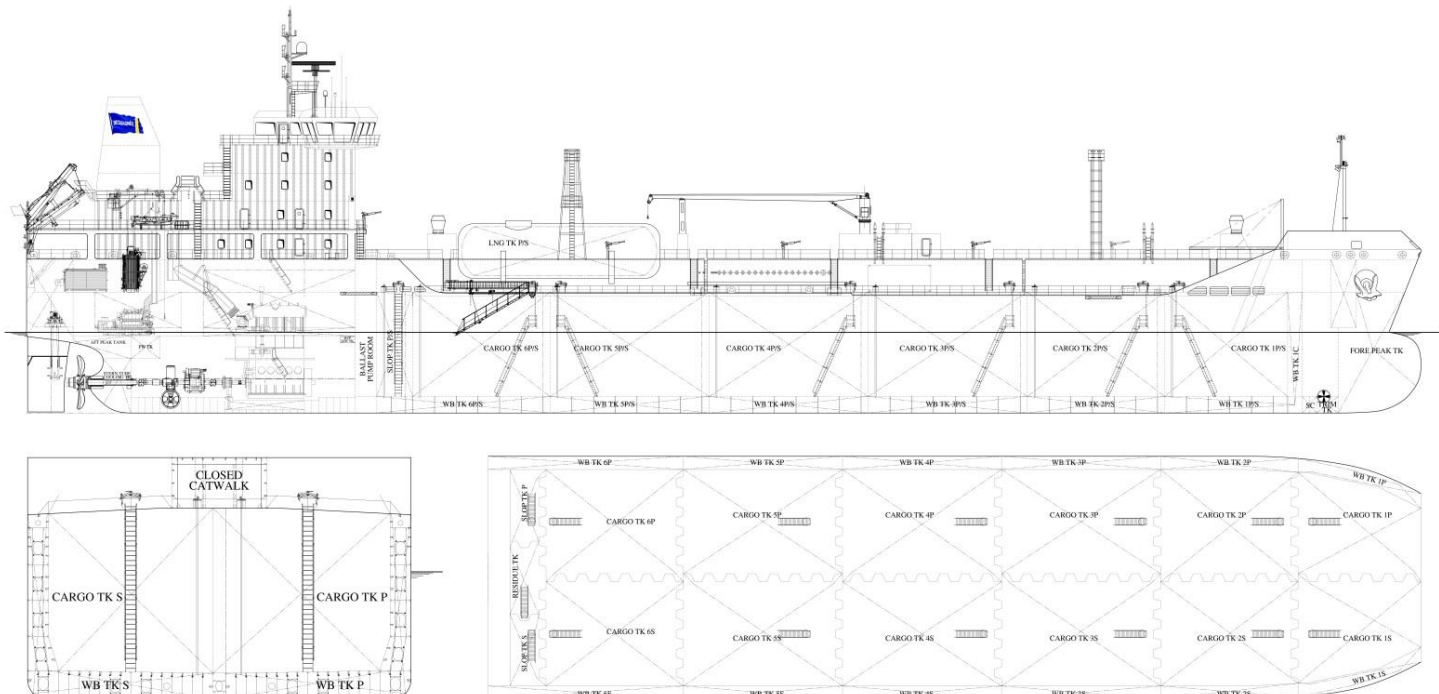

THESE PARTICULARS ARE BELIEVED TO BE CORRECT, BUT WITHOUT GUARANTEE AS TO THEIR ACCURACY, AND THEY MUST NOT BE USED AS BASIS FOR CHARTER PARTIES OR CONTRACTS WITHOUT OWNER'S EXPLICIT WRITTEN AUTHORIZATION.

(REV. 2018-04-09)